



Preferred Parts

Number:	C-041
Date Issued:	A-OCT06

HEXAGON SOCKET HEAD CAP SCREWS (SUPERSEDED)

This standard has been superseded by CNH Standard Parts, STPC120 (87366933), Hex Socket Head Cap Screws Inch.


The controlled versions of CNH specifications and standards are published on the CNH Intranet site.

The documents are also available on the CNH electronic viewing system (e.g. eViewer). Suppliers are able to access these documents on CSCN (CNH Supplier Communications Network).

The superseded standard remains available for viewing following this page if needed.

Supersedes Issue: C-041	Dated: DEC 88	Page: 1 of 2
----------------------------	------------------	-----------------

HEXAGON SOCKET HEAD CAP SCREWS (SUPERSEDED)

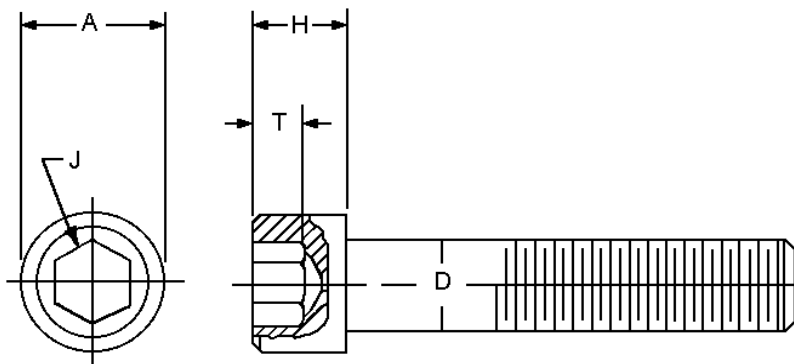

NOMINAL SIZE OR BASIC SCREW DIAMETER	D		A		H		J		T
	BODY DIAMETER		HEAD DIAMETER		HEAD HEIGHT		HEXAGON SOCKET SIZE		KEY ENGAGE- MENT
	MAX.	MIN.	MAX.	MIN.	MAX.	MIN.	NOM.		MIN.
4 0.112	.112	.107	.183	.176	.112	.108	3/32	.094	.051
6 0.138	.138	.133	.226	.218	.138	.134	7/64	.109	.064
8 0.164	.164	.158	.270	.262	.164	.159	9/64	.141	.077
10 0.190	.190	.184	.312	.303	.190	.185	5/32	.156	.090
1/4 0.250	.250	.243	.375	.365	.250	.244	3/16	.188	.120
5/16 0.312	.312	.305	.469	.457	.312	.306	1/4	.250	.151
3/8 0.375	.375	.368	.562	.550	.375	.368	5/16	.312	.182
7/16 0.438	.438	.429	.656	.642	.438	.430	3/8	.375	.213
1/2 0.500	.500	.492	.750	.735	.500	.492	3/8	.375	.245
5/8 0.625	.625	.616	.938	.921	.625	.616	1/2	.500	.307
3/4 0.750	.750	.740	1.125	1.107	.750	.740	5/8	.625	.370
1 1.000	1.000	.988	1.500	1.479	1.000	.988	3/4	.750	.495
1-1/4 1.250	1.250	1.233	1.875	1.852	1.250	1.236	7/8	.875	.620
1-1/2 1.500	1.500	1.482	2.250	2.224	1.500	1.485	1	1.000	.745

FOR GENERAL SPECIFICATIONS, SEE C-040.