

4

3

2

1

NOTES:
ALL DIMENSIONS APPLY BEFORE PLATING

CUSTOMER AUTHORIZATION REQUIRED
PRIOR TO PRINT RELEASE TO PRODUCTION

APPROVED



SIGNATURE

DATE

Pivot Point makes no claim nor warranty regarding the suitability
of this product in any individual application. Purchaser and/or end user
shall independently determine, and have responsibility for, suitability.

REVISIONS

REV	DATE	ZONE	DESCRIPTION	DRAWN	CHECKED
-----	------	------	-------------	-------	---------

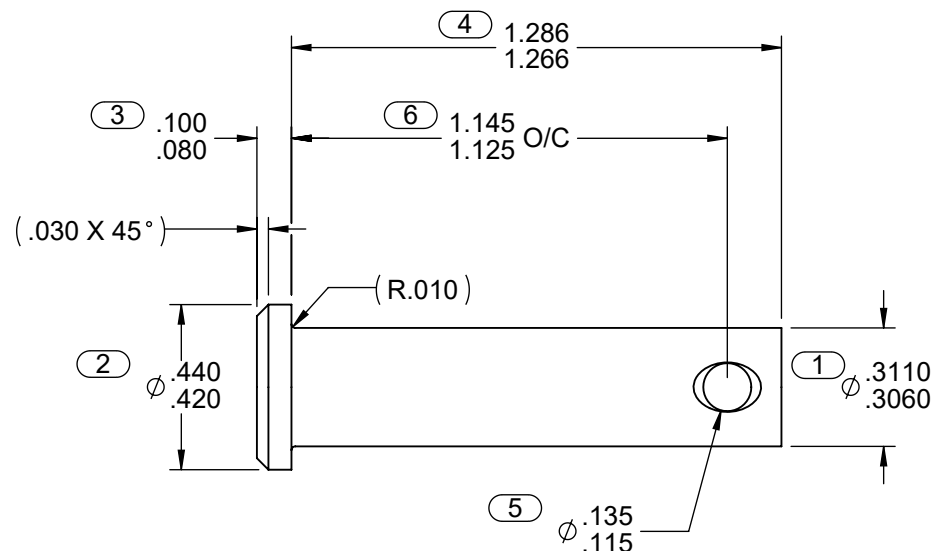

ISOMETRIC VIEW
SCALE 1:1

DO NOT SCALE DRAWING
UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
UNTOLERANCED DIMENSIONS ARE
FOR REFERENCE ONLY

THE INFORMATION CONTAINED IN THIS
DRAWING IS THE PROPERTY OF PIVOT POINT
INCORPORATED. ANY REPRODUCTION IN PART
OR AS A WHOLE, OR RELEASE TO ANY THIRD
PARTY WITHOUT WRITTEN PERMISSION FROM
PIVOT POINT INCORPORATED IS PROHIBITED.

PIVOTPOINT_{INC.}
PINS > CABLES > SOLUTIONS

DESCRIPTION

Ø 5/16" X 1-17/64" CLEVIS PIN

QTY.	PART NUMBER	DESCRIPTION	MATERIAL	HEAT TREAT	FINISH
1	3051010	Ø .305" CARBON STEEL WIRE	1010-1020 CARBON STEEL	CASE HARDEN .005" - .015", #58 FILE HARD, TEMPER AT 400°F MIN TO MAINTAIN HARDNESS AFTER PLATING BAKE, CERT REQUIRED	ZINC PLATE, BAKE, YELLOW TRIVALENT, .0003" MIN, CERT REQUIRED

DRAWN BY	CJK	06/01/26	DWG NUMBER	14494	PART NUMBER	CP5-127-Z	REVISION
CHECKED BY	TPT	06/01/26	SCALE	2:1	APPROX WEIGHT EA (LBS)	0.0295	SHEET 1 OF 1

4

3

2

1